
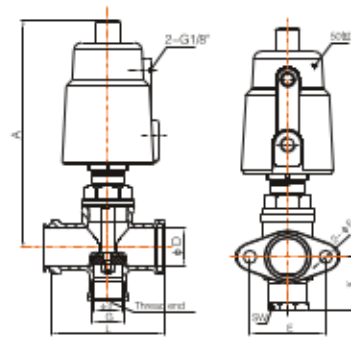



# Pneumatic Manifold Valve

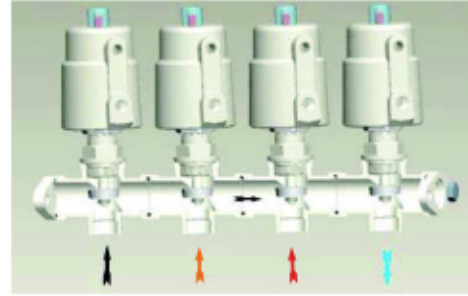

## Main Dimension

Size	A	K	L	D	d	d1	d2	ΦE	2-ΦF	Kv (m <sup>3</sup> /h)	Weight (kg)	Weld end	
DN20	153	30	76	25	18	21	25	50	8.5	8.1	1.2		
DN25	153	36	90	32	24	27	32	57	8.5	14.8	1.6		

Size	A	K	L	D	d	G	SW	ΦE	2-ΦF	Kv (m <sup>3</sup> /h)	Weight (kg)	Thread end	
DN15	153	35	76	25	18	1/2"	27	50	8.5	8.1	1.2		
DN25	153	46	90	32	24	1"	39	57	8.5	14.8	1.6		

## Technical Specification

<b>Fluid Pressure</b>	0-1.6MPa
<b>Control Pressure</b>	0.3-0.8MPa
<b>Advantages</b>	3-Way body; Assemble easily and save space; Best choice for mixing fluids.
<b>Control Medium</b>	Neutral gas, Air
<b>Seal Material</b>	PTFE
<b>Applicable Medium</b>	Water, Oil, Air and other liquid
<b>Medium Temperature</b>	-10°C — +180°C, +25°C — +220°C
<b>Ambient Temperature</b>	-10°C — +80°C
<b>Connection Type</b>	Flanged
<b>Control Type</b>	Normally closed, Double acting with spring, Double acting